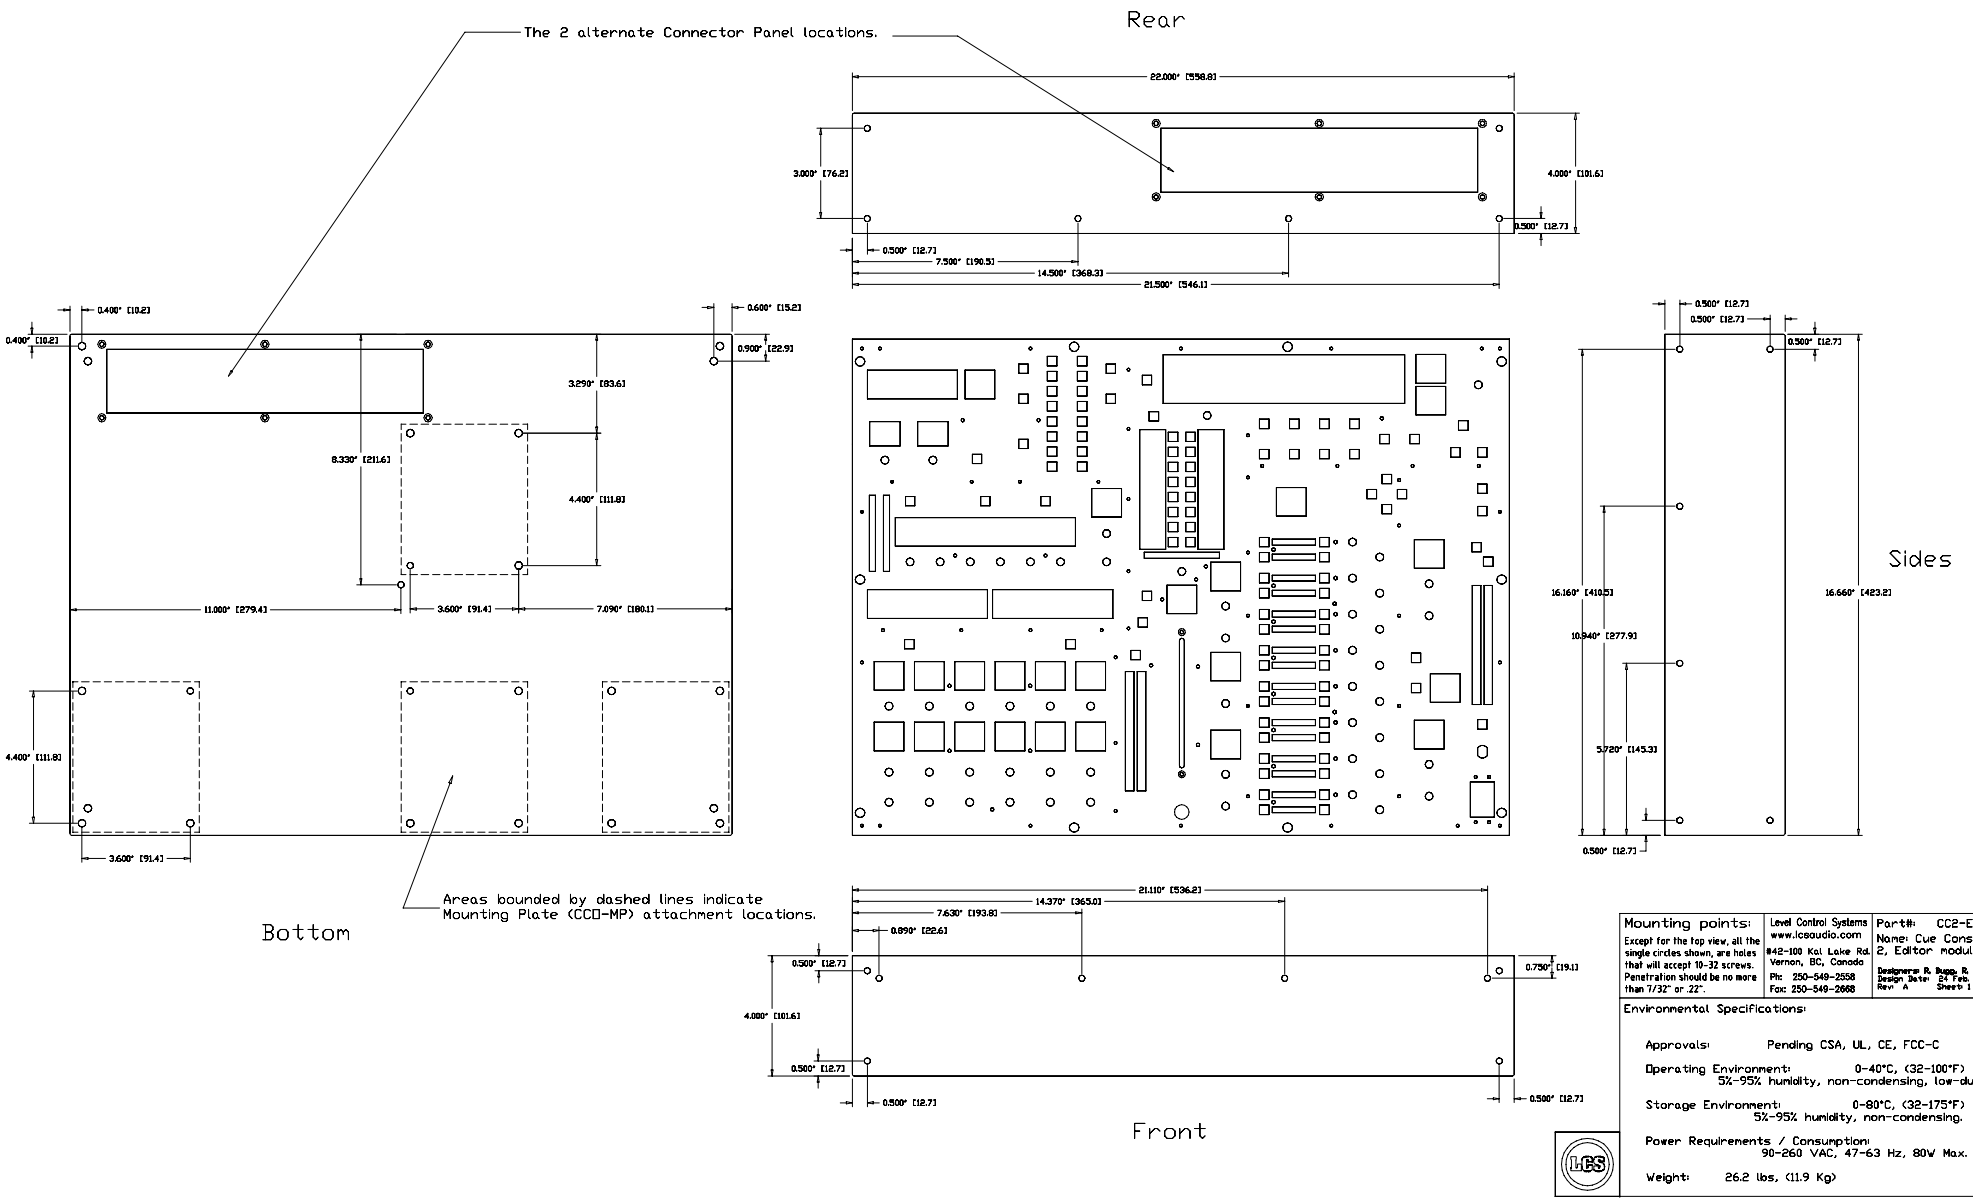

Mounting points: Except for the top view, all the single circles shown, are holes that will accept 10-32 screws. Penetration should be no more than 7/32" or .22".	Level Control Systems www.lcsaudio.com #42-100 Kal Lake Rd. Vernon, BC, Canada Ph: 250-549-2558 Fax: 250-549-2668	Part#: CC2-ED Name: Cue Console 2, Editor module Designer: R. Rupp, R. Stanco Design Date: 24 Feb. 2003 Rev: A Sheet: 1 of 1

Environmental Specifications:

Approvals: Pending CSA, UL, CE, FCC-C

Operating Environment: 0-40°C, (32-100°F)
5%-95% humidity, non-condensing, low-dust

Storage Environment: 0-80°C, (32-175°F)
5%-95% humidity, non-condensing.

Power Requirements / Consumption:
90-260 VAC, 47-63 Hz, 80W Max.

Weight: 26.2 lbs, (11.9 Kg)