



Rear

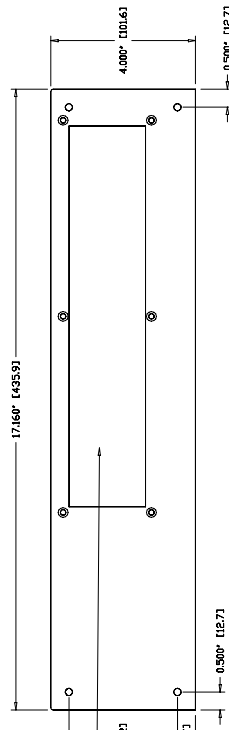


Top

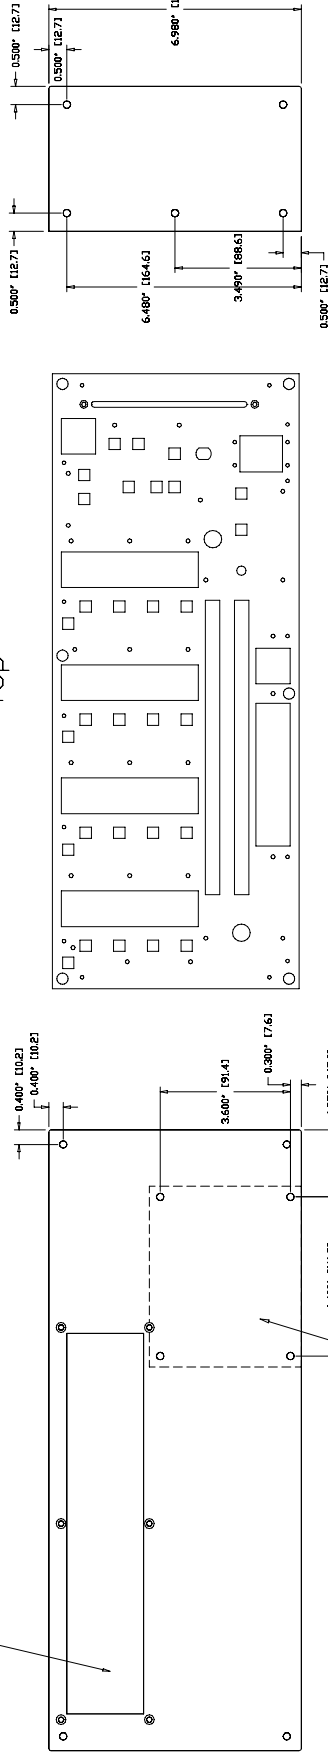

Sides

Bottom

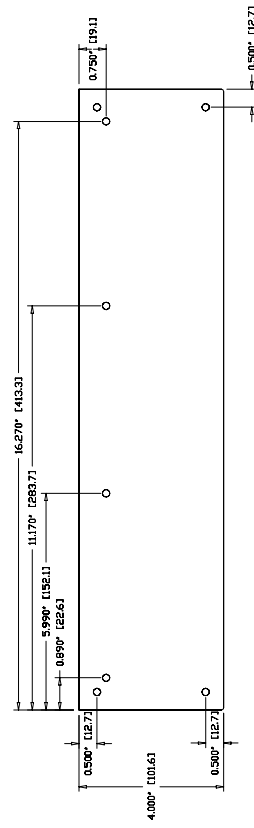

Front



Mounting points: Except for the top view, all the single circles shown, are holes that will accept 10-32 screws. Penetration should be no more than 1/32" or 22".	Level Control Systems www.lcsaudio.com 1145-100 Kai Lake Rd. Vernon, BC, Canada Ph: 250-549-2558 Fax: 250-549-2668 Rev: 3	Part#: CC2-TP Name: Cue Console 2, Transporter module Designed by: Doug R. Macco Design Date: 28 Feb. 2003 Sheet: 1 of 1
Environmental Specifications:		
Approvals:	Pending CSA, CE, FCC	
Operating Environment:	0-40°C, (32-100°F) 5%-95% humidity, non-condensing, low-dust	
Storage Environment:	0-80°C, (32-175°F) 5%-95% humidity, non-condensing.	
Power Requirements / Consumption:	90-260 VAC, 47-63 Hz, 40W Max.	
Weight:	11.6 lbs. (5.2 Kg)	