

LEO-M Ground Stack Links Kit (PN 40.215.326.01)



PARTS LIST

The LEO-M Ground Stack Link Kit includes the following parts:

- LEO-M Ground Stack Links (PN 61.215.326.01), quantity: 4

LEO-M GROUND STACK LINK INSTALLATION

The LEO-M Ground Stack Link Kit enables use of the MTG-LEO-M Grid as a base by flipping it upside down.

To attach the LEO-M Ground Stack Links to the MTG-LEO-M Grid:

1. Flip the MTG-LEO-M Grid upside down.
2. Insert the four grid links into the grid link slots.
3. Secure the grid links to the grid using the quick-release pins that come with the grid, 0.5-inch x 1.5-inch red button (PN 134.045).
4. Place the LEO-M loudspeaker on the grid, aligning the loudspeaker's link slots on top of the grid links.
5. Insert the quick-release pins that come with the loudspeaker, 0.5-inch x 1.125-inch blue button (PN 134.044) to secure.

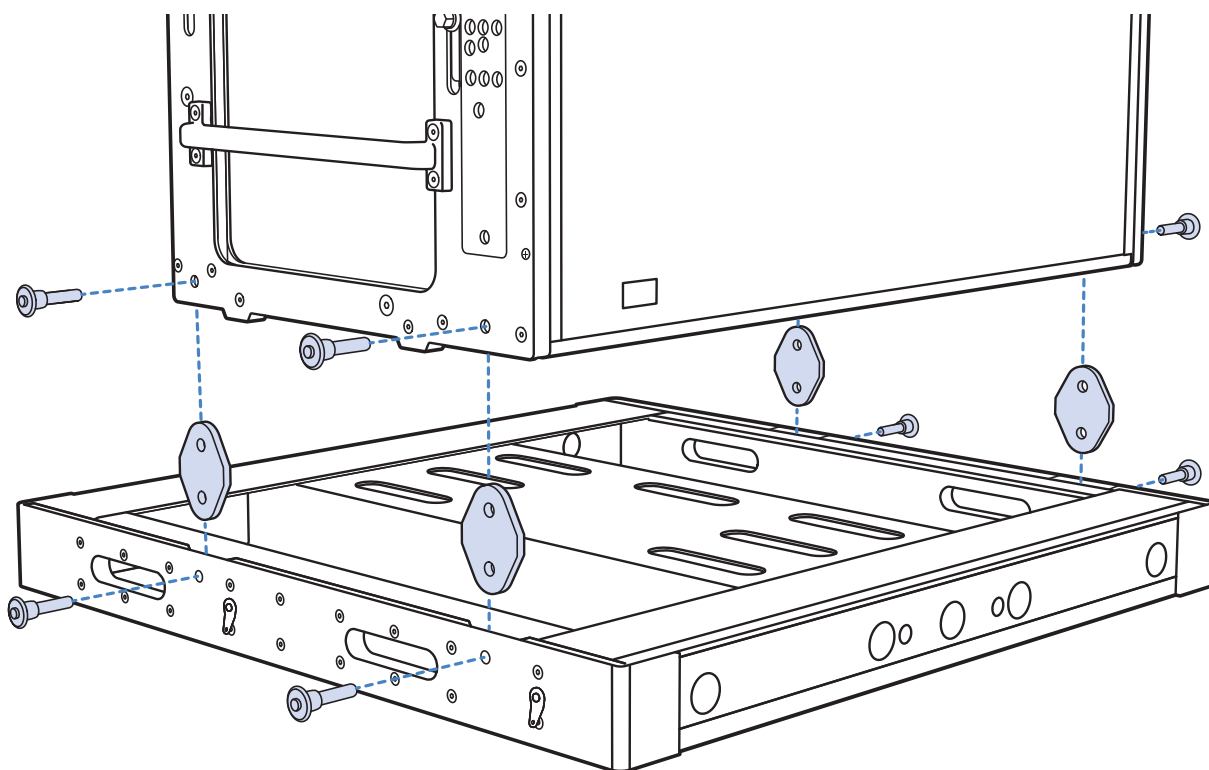


Figure 1: MTG-LEO-M Grid Used as a Base (Flipped upside down and using LEO-M Groundstack Links)



CAUTION: A maximum of six loudspeakers may be ground-stacked on top of the initial loudspeaker (7 total) with 0° splay angle between the first loudspeaker and the grid and 5° max splay angle between each successive loudspeaker.



NOTE: The mounting holes are not centered. The splay of the speakers should curve an array toward the middle of the grid if properly oriented (Figure 2).

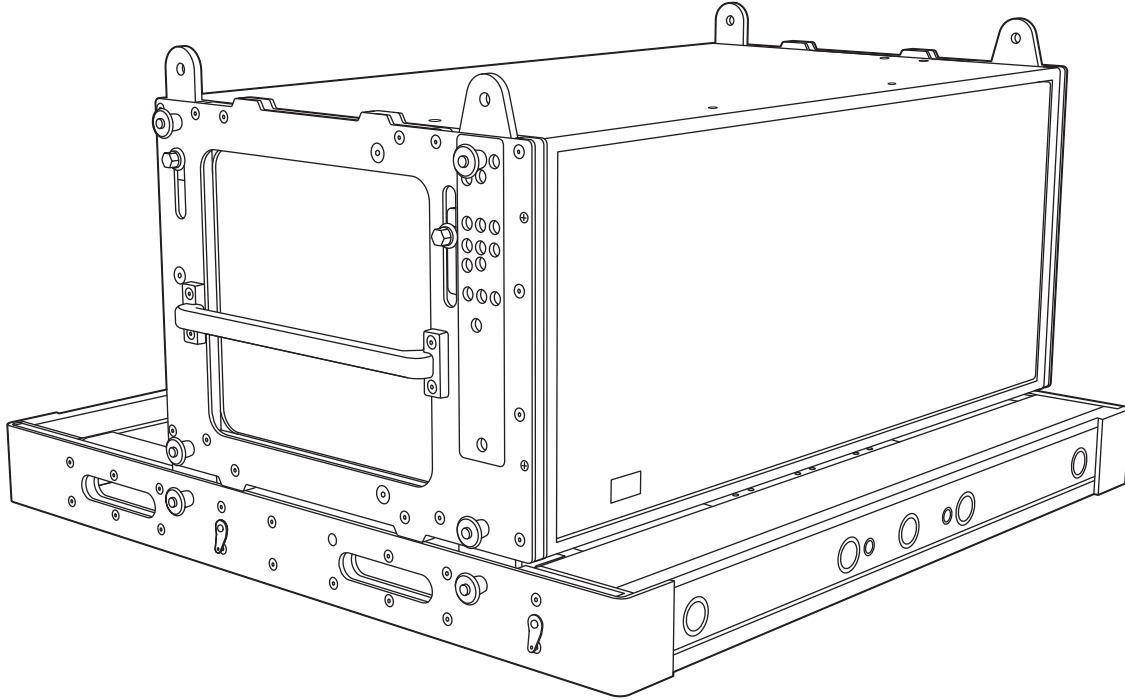


Figure 2: Orientation of Loudspeaker in order for Splay to Curve an Array toward Middle of Grid.



THINKING SOUND

Meyer Sound Laboratories Inc.
2832 San Pablo Avenue
Berkeley, CA 94702
+1 510 486.1166
meyersound.com

© 2020
Meyer Sound. All rights reserved.
LEO-M Ground Stack Link Kit Installation Instructions
PN 05.215.326.01 A