






Ultra Reflex™ Components and Optional Accessories



CONTENTS

<b>ULTRA-X22 Compact Narrow Coverage Loudspeaker.....</b>	<b>1</b>	<b>Ultra Reflex LF-15 Compact Cinema Loudspeaker .....</b>	<b>7</b>
MUB-X20 U-Bracket (PN 40.297.454.01) .....	2	MUB-AMIE-SUB U-Bracket (PN 40.251.050.01) .....	7
MYA-X20 Yoke (PN 40.297.450.01).....	2	Black Cloth Grille (PN 40.251.006.01).....	7
MTC-X20 Top Channel (PN 40.297.430.01) .....	2	<b>Ultra Reflex LF-18 Compact Cinema Loudspeaker .....</b>	<b>8</b>
<b>ULTRA-X42 Compact Narrow Coverage Loudspeaker.....</b>	<b>3</b>	MCF-900-LFC Caster (PN 40.246.130.01).....	8
MUB-X40 U-Bracket (PN 40.287.055.01) .....	3	MRK-900-LFC Rigging (PN 40.246.168.01).....	8
MYA-X40 Yoke (PN 40.287.039.01).....	3	MG-900-LFC Grid (PN 40.243.080.01) .....	9
MTB-X40 Top Bracket (PN 40.287.150.01) .....	4	MG-900-LFC Tilt Feet (PN 40.243.163.01) .....	9
MTC-X40 Top Channel (PN 40.287.130.01).....	4		
<b>LINA Very Compact Linear Line Array Loudspeaker .....</b>	<b>5</b>		
MUB-LINA U-Bracket (PN 40.207.030.01).....	5		
MYA-LINA Yoke (PN 40.207.104.01) .....	5		
MG-LINA Grid (PN 40.207.101.02).....	6		
MCF-LINA Caster (PN 40.207.102.01) .....	6		


ULTRA-X22 COMPACT NARROW COVERAGE LOUDSPEAKER

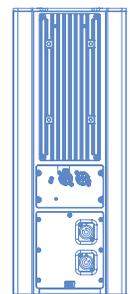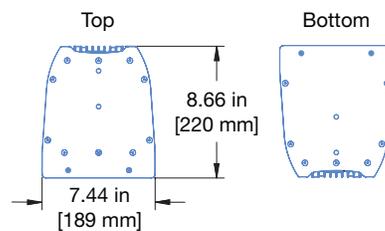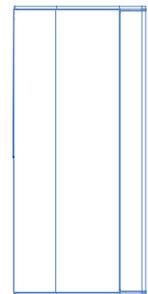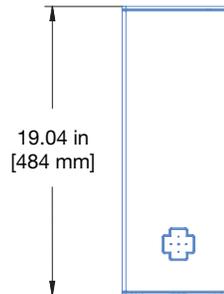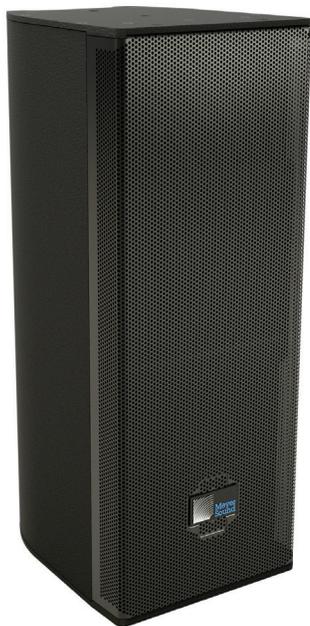

Weight 27 lb [12.3 kg]  
 Total Output Power 860 W peak  
 Maximum Long Term Continuous Current Draw (> 10 sec) 0.9 A rms (115 V AC); 0.5 A rms (230 V AC); 1.1 A rms (100 V AC)

## MUB-X20 U-BRACKET (PN 40.297.454.01)


---

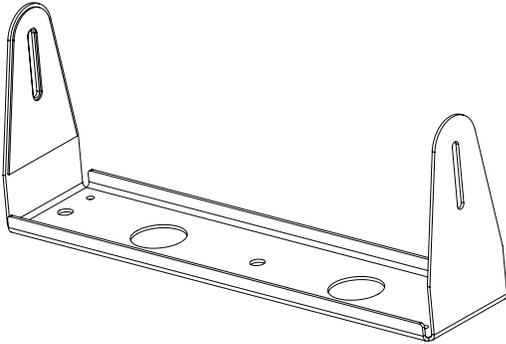

Width 19.45 in [494 mm]  
Height 7.87 in [200 mm]  
Depth 4.55 in [116 mm]  
Self-weight 5 lb [2.3 kg]  
Load rating 5:1 25 lb [11.4 kg]

## MYA-X20 YOKE (PN 40.297.450.01)


---

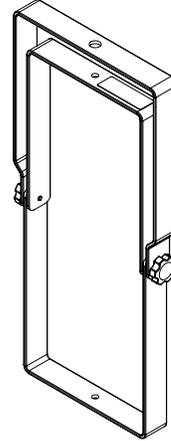

Width 9.82 in [249 mm]  
Height 21.26 in [540 mm]  
Depth 1.50 in [38 mm]  
Self-weight 8 lb [3.6 kg]  
Load rating 5:1 25 lb [11.4 kg]




## MTC-X20 TOP CHANNEL (PN 40.297.430.01)

---

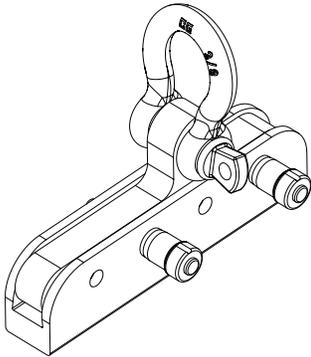

Width 0.87 in [22 mm]  
Height 2.37 in [60 mm]  
Depth 5.2 in [132 mm]  
Self-weight 0.3 lb [0.1 kg]  
Load rating 5:1 50 lb [22.7 kg]

## ULTRA-X42 COMPACT NARROW COVERAGE LOUDSPEAKER

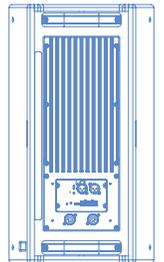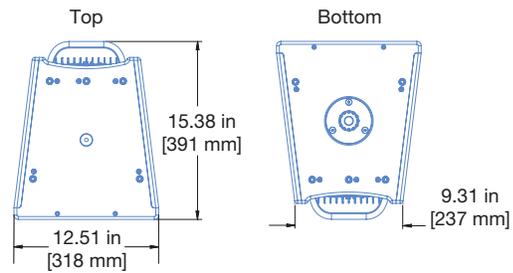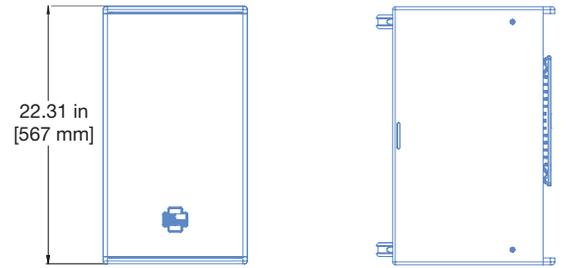


**Weight** 52 lb [23.6 kg]

**Total Output Power** 1950 W peak

**Maximum Long Term Continuous Current Draw (> 10 sec)** 1.9 A rms (115 V AC); 1.0 A rms (230 V AC); 2.2 A rms (100 V AC)

## MUB-X40 U-BRACKET (PN 40.287.055.01)

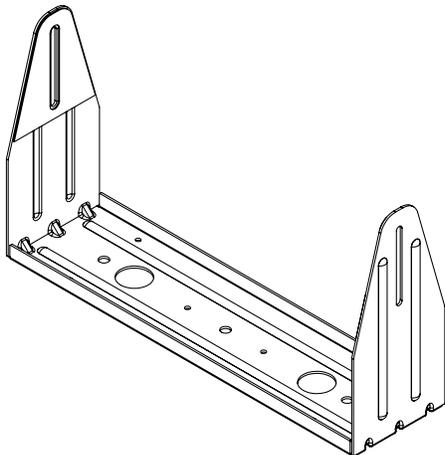

**Width** 23.14 in [494 mm]


**Height** 4.50 in [114 mm]

**Depth** 12.66 in [322 mm]

**Self-weight** 10 lb [4.5 kg]

**Load rating 5:1** 52 lb [23.6 kg]

## MYA-X40 YOKE (PN 40.287.039.01)

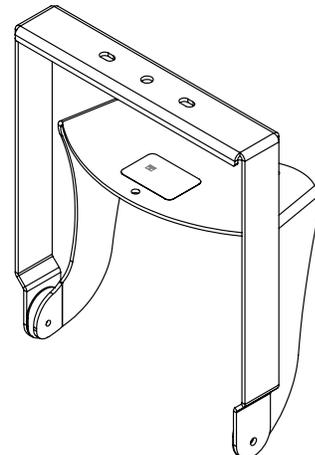

**Width** 12.04 in [306 mm]


**Height** 16.13 in [410 mm]

**Depth** 2.60 in [66 mm] (top bar)

**Self-weight** 12 lb [5.5 kg]


**Load rating 5:1** 52 lb [23.6 kg]

## MTB-X40 TOP BRACKET (PN 40.287.150.01)

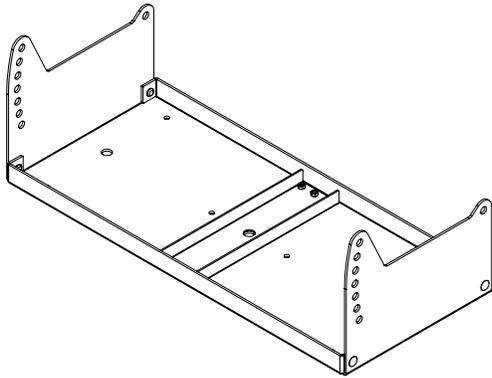


Width	22.91 in [582 mm]
Height	7.87 in [200 mm]
Depth	10.00 in [254 mm]
Self-weight	12 lb [5.5 kg]
Load rating 5:1	156 lb [70.9 kg] (see ULTRA-X40 Operating Instructions for restrictions)

## MTC-X40 TOP CHANNEL (PN 40.287.130.01)

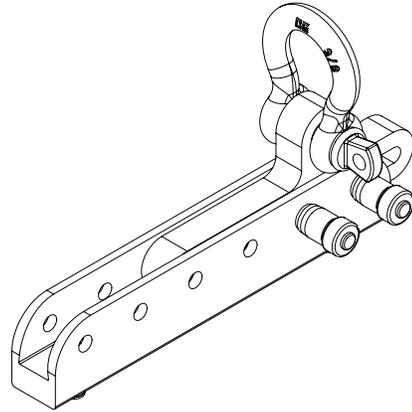

Width	0.87 in [22 mm] (without pins)
Height	2.37 in [60 mm] (without shackle)
Depth	6.7 in [170 mm]
Self-weight	0.7 lb [0.3 kg]
Load rating 5:1	260 lb [118 kg] (top mount, see ULTRA-X40 Operating Instructions for restrictions) 104 lb [47.3 kg] (bottom mount, see ULTRA-X40 Operating Instructions for details)


# LINA VERY COMPACT LINEAR LINE ARRAY LOUDSPEAKER

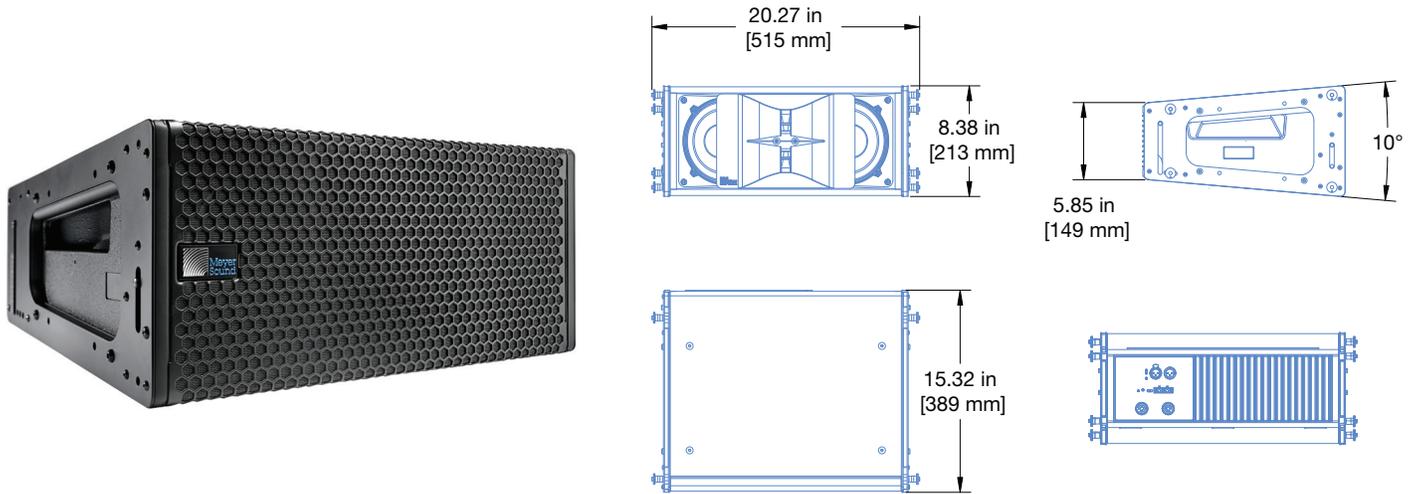


**Weight** 43 lb [19.5 kg]  
**Total Output Power** 1950 W peak  
**Maximum Long Term Continuous Current Draw (> 10 sec)** 2.3 A rms (115 V AC); 1.16 A rms (230 V AC); 2.8 A rms (100 V AC)

## MUB-LINA U-BRACKET (PN 40.207.030.01)

## MYA-LINA YOKE (PN 40.207.104.01)

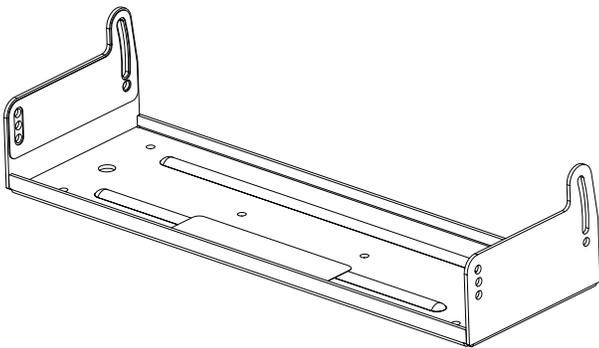


**Width** 18.89 in [480 mm]  
**Height** 4.28 in [109 mm]  
**Depth** 6.00 in [152 mm]  
**Self-weight** 5.8 lb [2.63 kg]  
**Load rating 5:1** 217 lb [98 kg] (see MG-MINA/LINA Assembly Guide for more details)

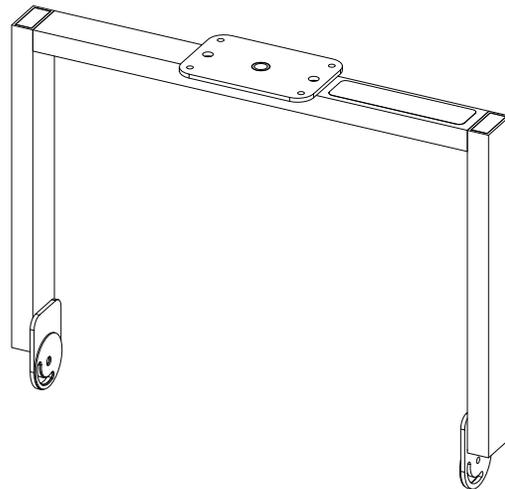


**Width** 22.53 in [572 mm]  
**Height** 17.49 in [444 mm]  
**Depth** 4.00 in [102 mm] (center plate)  
**Self-weight** 12.9 lb [5.85 kg]  
**Load rating 5:1** 130 lb [59 kg] (see MG-MINA/LINA Assembly Guide for more details)

## MG-LINA GRID (PN 40.207.101.02)

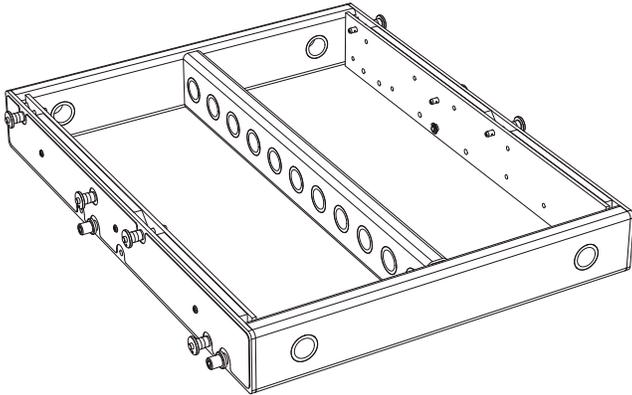


Width	23.14 in [494 mm]
Height	4.50 in [114 mm]
Depth	12.66 in [322 mm]
Self-weight	39 lb [17.7 kg]
Load rating 5:1	696 lb [316 kg] (See LINA Operating Instructions for details)

## MCF-LINA CASTER (PN 40.207.102.01)

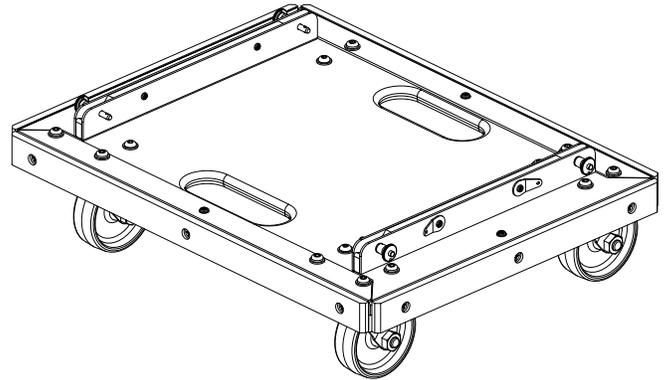


Width	23.96 in [609 mm]
Height	7.21 in [183 mm] (including casters)
Depth	18.46 in [469 mm]
Self-weight	28 lb [12.7kg]
Load rating	Transport up to 5 LINA

# ULTRA REFLEX LF-15 COMPACT CINEMA LOUDSPEAKER

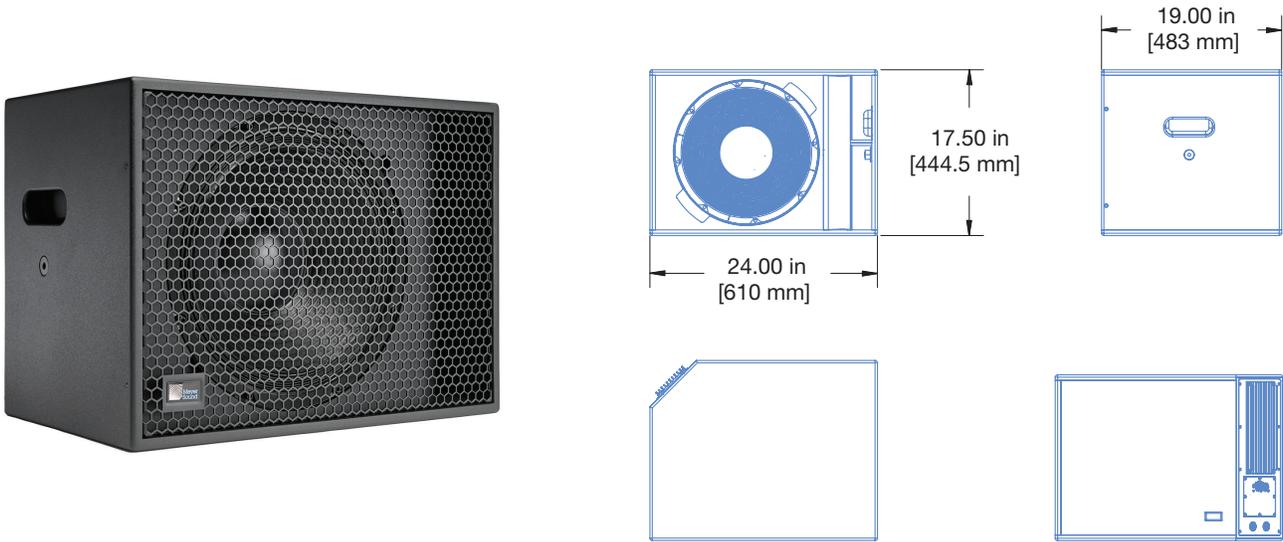


**Weight** 74 lb [33.5 kg]  
**Total Output Power** 1100 W peak  
**Maximum Long Term Continuous Current Draw (> 10 sec)** 1.4 A rms (115 V AC); 0.7 A rms (230 V AC); 1.5 A rms (100 V AC)

## MUB-AMIE-SUB U-BRACKET (PN 40.251.050.01)

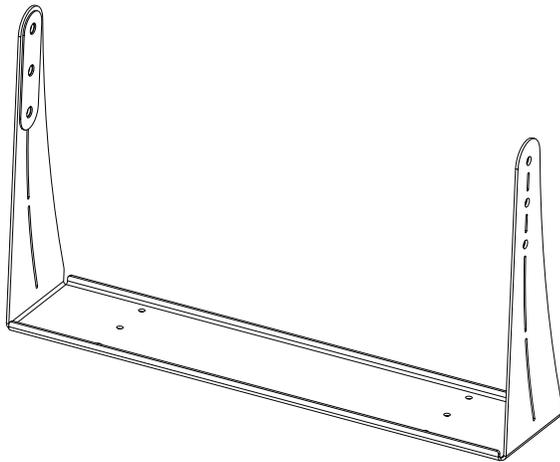


**Width** 24.44 in [621 mm]  
**Height** 15.00 in [381 mm]  
**Depth** 5.49 in [139 mm]  
**Self-weight** 7.9 lb [3.58 kg]  
**Load rating 7:1** 75 lb [34 kg]

## BLACK CLOTH GRILLE (PN 40.251.006.01)

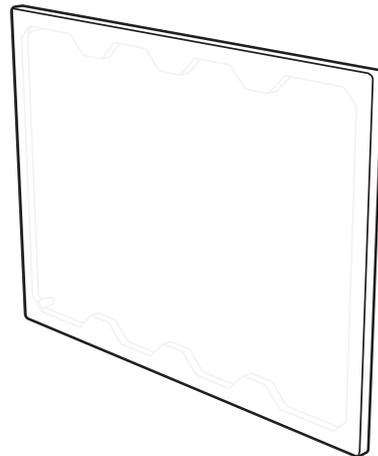

**Width** 23.75 in [603 mm]  
**Height** 17.25 in [438 mm]  
**Depth** 0.59 in [15 mm]

## ULTRA REFLEX LF-18 COMPACT CINEMA LOUDSPEAKER

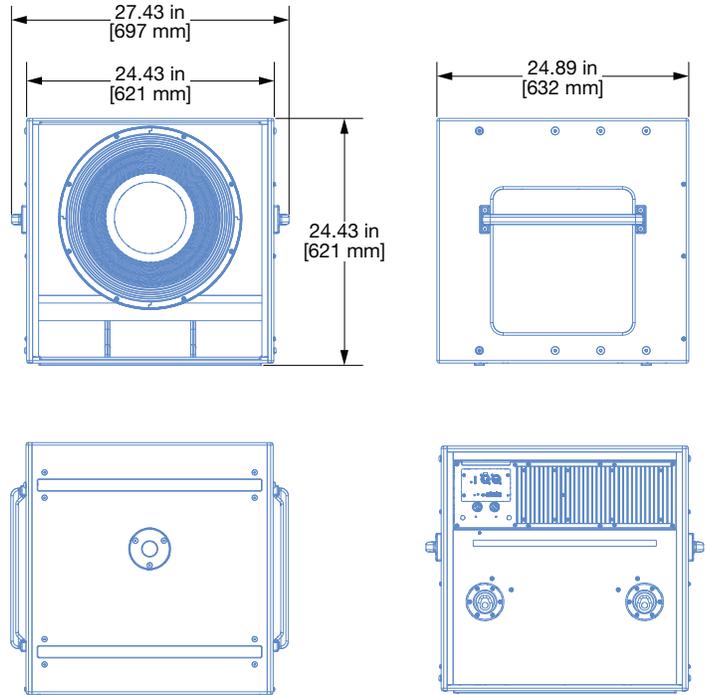


**Weight** 136 lb [61.7 kg] (without rigging)

**Total Output Power** 3100 W peak

**Maximum Long Term Continuous Current Draw (> 10 sec)** 4.9 A rms (115 V AC); 2.5 A rms (230 V AC); 5.2 A rms (100 V AC)

### MCF-900-LFC CASTER (PN 40.246.130.01)

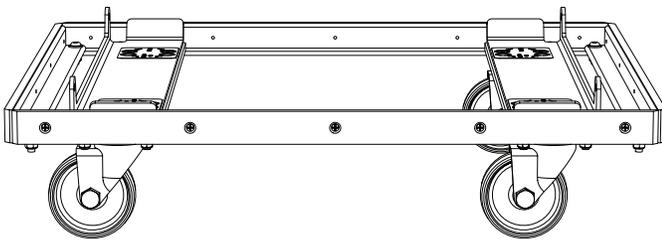

**Width** 29.75 in [756 mm]


**Height** 6.44 in [164 mm] (including casters)

**Depth** 27.84 in [707 mm]

**Self-weight** 46 lb [20.9 kg]

**Load rating** Up to 2 Ultra Reflex LF-18

### MRK-900-LFC RIGGING (PN 40.246.168.01)

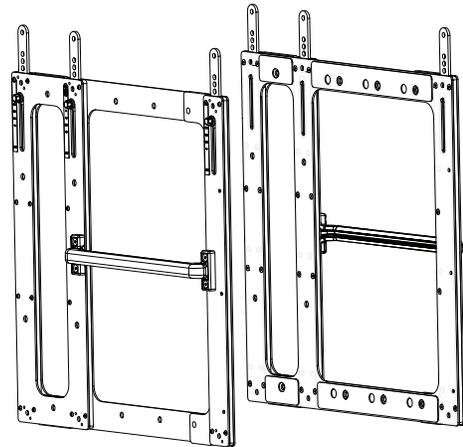

**Width** 24.89 in [632 mm]


**Height** 24.33 in [618 mm] (retracted)

**Depth** 2.12 in [54 mm] (with handle)

**Self-weight** 23 lb [10.43 kg] (both sides)


**Load rating** N/A

## MG-900-LFC GRID (PN 40.243.080.01)

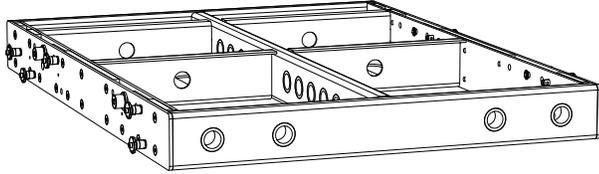

Width	26.49 in [673 mm]
Height	3.00 in [76 mm]
Depth	33.5 in [851 mm]
Self-weight	60.5 lb [27.5 kg]
Load rating 5:1	2067 lb [940 kg] (hanging only) Groundstack up to 3 loudspeakers

## MG-900-LFC TILT FEET (PN 40.243.163.01)

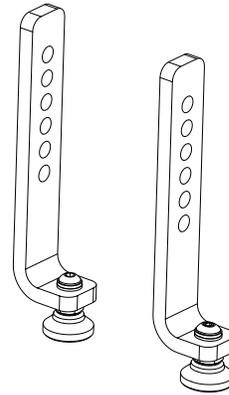

Width	1.00 in [25 mm]
Height	6.69 in [170 mm]
Depth	1.53 in [39 mm]
Self-weight	2 lb [0.9 kg]
Load rating	Not rated for hanging Use only in groundstack applications (up to 3 loudspeakers)

**Note:** Information on Load Ratings provided for feasibility purposes only. In some cases, restrictions apply. See the appropriate loudspeaker Operating Instructions or Rigging Assembly documents for more details. Meyer Sound documentation available at [meyersound.com/documents](https://meyersound.com/documents).